

# LIFT


# GGA 800 COUNTERBALANCER



Counterweight balancers combined with vacuum lifters serve for safely and ergonomically installing glasses or window elements in difficult to access areas – such as under canopies, balconies, eaves etc. The vacuum lifter can directly be connected to the counterweight balancer with an interchangeable adapter or alternatively, it can be mounted to the load hook of the counterweight balancer while maintaining the rotating and tilting function.

It is important that the Release function of the vacuum lifter is coupled electrically to the position of the travelling cage of the counterweight balancer. In this way it can be ensured that the counterweight balancer remains in a neutral, balanced position after performing the command Release of the suctioned load.

The OKTOPUS® GL-RN 400/600/800 vacuum lifting devices can optionally be equipped with a function that controls the travelling cage of the counterweight balancer.

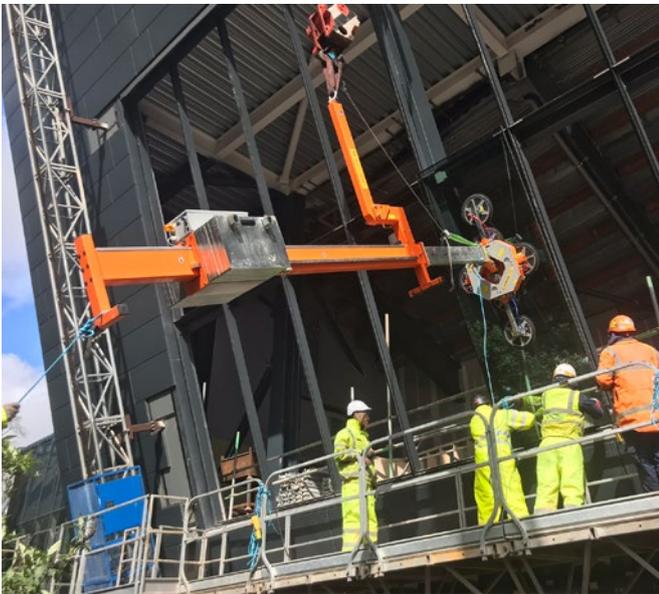

## APPLICATION DATA

Counterweights	24 pieces removable (1 counterweight = 25 kg)
Operation	CB-E-FB 800/24/2,0 with load hook: with cable remote control of the cable remote control CB-E-FB 800/24/2,0 together with vacuum lifter OKTOPUS® GL-RN 400/600/800: with cable or radio remote control of the vacuum lifter
Power Supply	24 V DC battery system

