

**LIFT**

# GLASSMAX 250

The lightweight manual Glassmax hoist can be combined with a GGR vacuum lifter for quick and effective installation of vertical glazing.

The Glassmax hoist can handle loads of up to 250kg to a hook height of 7.2 metres. The Glassmax is simple to build and dismantle, with removable counterweights, making it easy to transport to site.

An optional fork attachment can be used for the installation of HVAC units, pipes, ducts and palletised loads up to a maximum height of 7.5m.


## KEY FEATURES

- Capacity: 250kg or 500kg
- Counterweight system
- Ideal for vertical glazing when combined with a vacuum lifter
- Optional 240v powered winch available
- Optional fork attachment
- Vacuum lifter sold/hired separately
- Ref: MCO07 (250kg) & MCO09 (500kg)

## TECHNICAL TABLE

Capacity	250kg
Max. hook height	7.2m
Max fork height	7.5m
Width	800mm
Length	2130mm
Weight (exc. counterweights)	230kg
Weight (inc. counterweights)	330kg

## TECHNICAL DATA (MM)

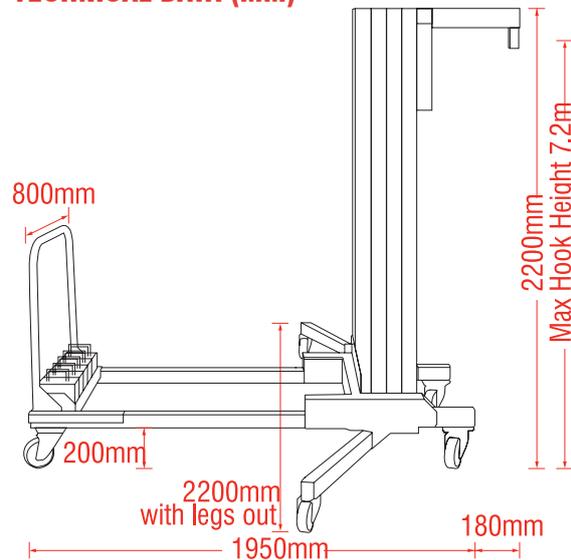

Note 1: Counterweights must be secured before lifting.  
Note 2: When using fork attachment the load must be centralised and secured.



Optional Electric Winch Motor



Optional Fork Attachment  
560mm (w) x 700mm (l)  
(Ergo Hoist)