

TRACKED CRANE RK36/2400




- Total width 2.11m
- Max lift 2400kg
- Lightweight 4500kg
- Max boom length 36m
- Fully variable outriggers
- Radio remote control

Technical Data


Permissible gross vehicle weight (t)	4.5
Max payload (kg)	1500 (optional 2400)
Max. extension length (m)	34 (optional 36)
Hook height max. (m)	32.6 (34.7)
Working height up to boom (m)	23.4
Boom extendable (m)	4.9 / 8.0 / 11.1 (opt. 13.1)
Boom payload (kg)	2400 / 1500 / 800 / 500 / (250)
Main mast angle (degrees)	85
Boom angle (degrees)	162
Pivoting range (degrees)	+/- 310
Hook speed (m/min)	50
Range for crane operation at 250kg (m)	23.1 (23.5)
Range for crane operation at 500kg (m)	16.6
Range for crane operation at 800kg (m)	12.9
Range for crane operation at 1 t (m)	10.0
Range for crane operation at 1,5 t (m)	7.5
Range for crane operation at 2 t (m)	5.4
Range for platform operation at 250 kg (m)	15.8
Range for platform operation at 100 kg (m)	18.8
Working height in platform operation max. (m)	30.5



Working Range CRANE OPERATION


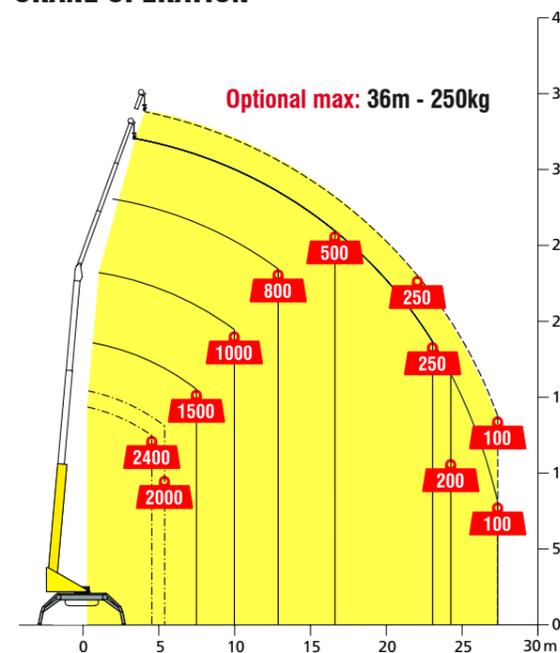


PLATFORM OPERATION

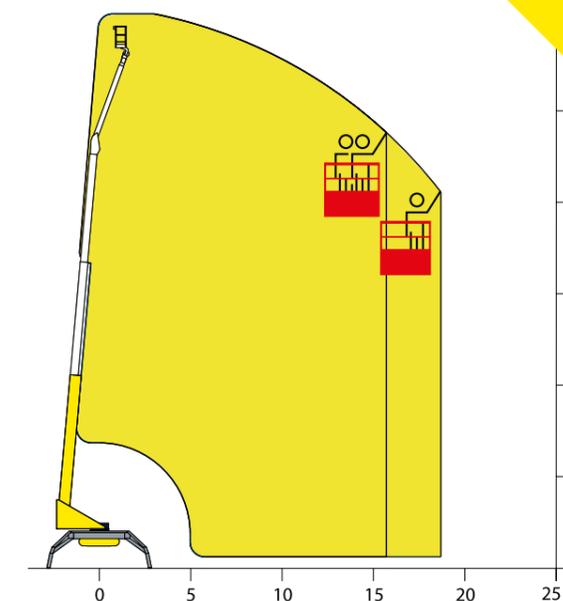

Please note: For full specifications and advice on working ranges and leg configurations, please contact our office.

Dimensions

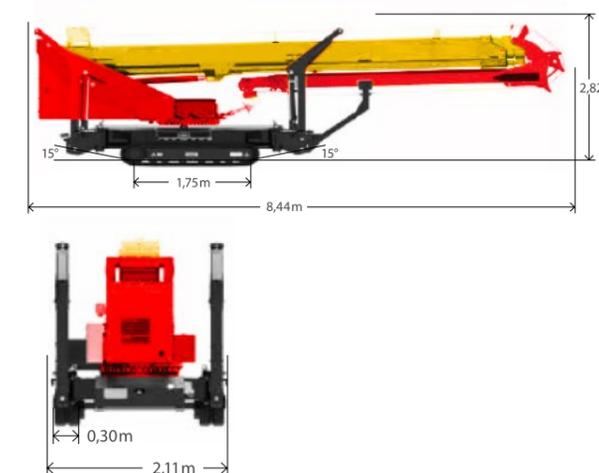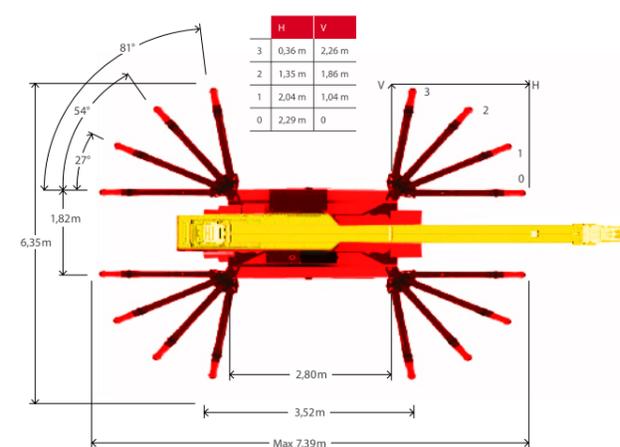

WORKING PLATFORM

Beside operation as a crane, this machine can also be used as working platform. Thanks to the EASY-LOCK system, a conversion from crane to platform operation is possible within shortest time.

- 250kg SWL platform (2 persons)
- Basket manual controls
- Rotation facility – for 180° rotation